

19" Category 6 shielded Patch panel, 24 ports RJ45, Dual IDC, 0.5U loaded

CAT6 FTP 24-port patch panel, 110 type, matches and exceeds CAT6 350MHZ connecting hardware specifications, comply with Gigabit Ethernet applications, suitable for interaction and termination of horizontal cabling between devices, equipment and centralized points.

APPLICATION

- Horizontal Distribution & Backbone Cabling
- 4/16 Mbps Token Ring (IEEE 802.5)
- 10/100/1000/10G BASE-T (IEEE 802.3)
- 155 Mbps ATM
- 100Mbps TP-PMD
- ISDN, ADSL
- ATM LAN 1.2G
- RoHS Compliant
- Power over Ethernet (PoE) / Type 1-4




STANDARDS

ANSI/TIA 568-2.D	EN 50173-2:2007 + A1:2010
IEC 60603-7-41:2010	EN 50173-1:2018
ISO/IEC 11801-1:2017	RoHS-II/-III (2011/65/EU & 2015/863): 2023
ANSI/EIA-310-E	



PRODUCT DIMENSIONS

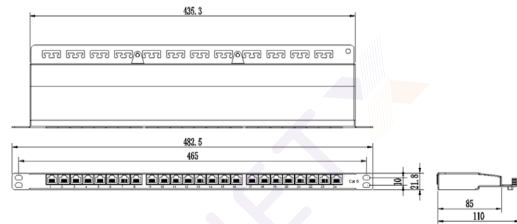

MECHANICAL CHARACTERISTICS

Contact Resistance Max	20 mΩ
Insulation Resistance Min	500 MΩ
Return Loss (dB)	5.8 dB
Operating Temperature (C)	-25 ~ 75
Installation Temperature (C)	0 ~ 60

FEATURES

- Unique exterior design, simple, compact and beautiful
- High strength die-casted zinc alloy shielding design meets the industry shielding standards
- 110 krone punch down tools are available
- Solid and corrosion phosphor bronze IDC enables over 250 terminations
- Solid and easy installation design saves installation and operation costs
- Be compatible with 19-inch equipment racks, cabinets and wall mount shelf
- All ports are clearly labeled, especially the large in the front are helpful for ports identification
- With 50μ" gold plate, durability is 1500 matching recycles
- With cable management in the rear for effective guidance of cables and termination points
- With backward compatibility of CAT5E and lower classes

ORDERING

Part No.	Description
14C6S1L205-19	19" Category 6 shielded Patch panel, 24 ports RJ45, Dual IDC, 0.5U loaded